

DH-CA-DBW181R-VF

720TVL HDIS Day/Night Vandal-proof IR Dome Camera



Features

- 1/3" HDIS
- High resolution of 720TVL
- Day/Night(ICR), AWB, AGC, BLC
- 2.7~12mm vari-focal lens
- Max. IR LEDs length 30m, Smart IR
- IP66, IK10, DC12V

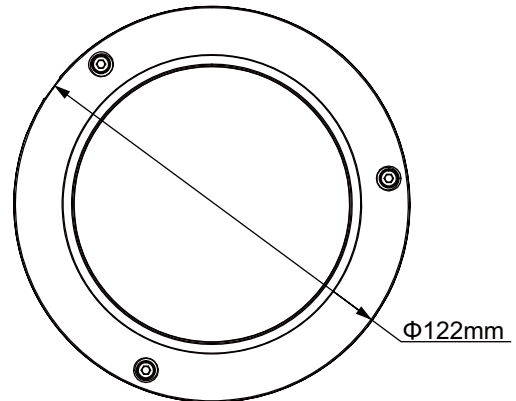
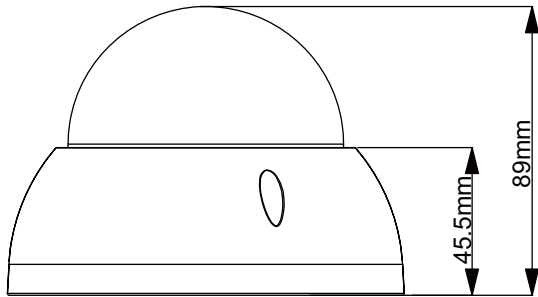
DH-CA-DBW181R-VF

Technical Specifications





Model	DH-CA-DBW181RP-VF	DH-CA-DBW181RN-VF
Camera		
Image Sensor	1/3" HDIS	
Effective Pixels	960(H)×480(V)	
Horizontal Resolution	720TVL	
Electronic Shutter	1/50s~1/100,000s	1/60s~1/100,000s
Synchronization	Internal	
Min. Illumination	0.02Lux@F1.2(AGC ON), 0Lux IR on	
S/N Ratio	More than 65dB (AGC Off)	
Video Output	1Vp-p Composite Output (75Ω/BNC)	
Camera Features		
Max. IR LEDs Length	30m, Smart IR	
Day/Night	Auto(ICR) / Color / B/W	
Noise Reduction	2D	
Lens		
Focal Length	2.7~12mm	
Angle of View	H: 90° ~28.7°	
Lens Type	Manual / Fixed Iris	
Mount Type	Φ14	
General		
Power Supply	DC12V±10%	
Power Consumption	3.1W	
Working Environment	-40°C~+60°C / Less than 95%RH (no condensation)	
Ingress Protection	IP66 & IK10	
Dimensions	Φ122mm×89mm	
Weight	0.45kg	

DH-CA-DBW181R-VF

Dimensions (mm)



Accessories (optional)

			
PFA123	PFA151	PFA152	PFB200W

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology