

DH-CA-FW191I

Mega-HDIS Water-proof IR-Bullet Camera



Features

- 1/3" 1.3Mega HDIS
- High resolution of 800TVL
- DWDR, Day/Night(ICR), DNR(2D&3D), AWB, AGC,BLC, Picture Adjustment
- Control over coaxial
- 2.7~9mm sync focus lens, motorized zoom
- Max. IR LEDs length 50m, Smart IR
- IP66, OSD, DC12V


DH-CA-FW191I

Technical Specifications

Model	DH-CA-FW191IP	DH-CA-FW191IN
Camera		
Image Sensor	1/3" 1.3Mega HDIS	
Effective Pixels	1280(H)×960(V)	
Horizontal Resolution	800TVL	
Electronic Shutter	4/25s~1/45,000s	
Synchronization	Internal	
Mini. Illumination	0.01Lux@F1.2(AGC ON)	
S/N Ratio	More than 65dB	
Video Output	1Vp-p Composite Output (75Ω/BNC)	
Camera Features		
Max. IR LEDs Length	50m, Smart IR	
OSD	English, Chinese	
Day/Night	Auto(ICR) / Color / B/W	
Backlight Compensation	BLC	
White Balance	Auto Trace WB1 / Auto Trace WB2 / Manual / Auto	
Gain Control	Auto	
Noise Reduction	2D/ 3D	
Picture Adjustment	Mirror / Brightness / Contrast / Sharpness / Hue / Gain	
Lens		
Focal Length	2.7~9mm	
Focus Control	Auto	
Lens Type	Motorized	
Mount Type	Φ14	
General		
Power Supply	DC12V±10%	
Power Consumption	Max 7.2W	
Working Environment	-40°C~+60°C / Less than 95%RH	
Ingress Protection	IP66	
Dimensions(W×D×H)	273.3mm × 94.8mm× 94.8mm	
Weight	1.2Kg	

DH-CA-FW191I

Dimensions (mm)

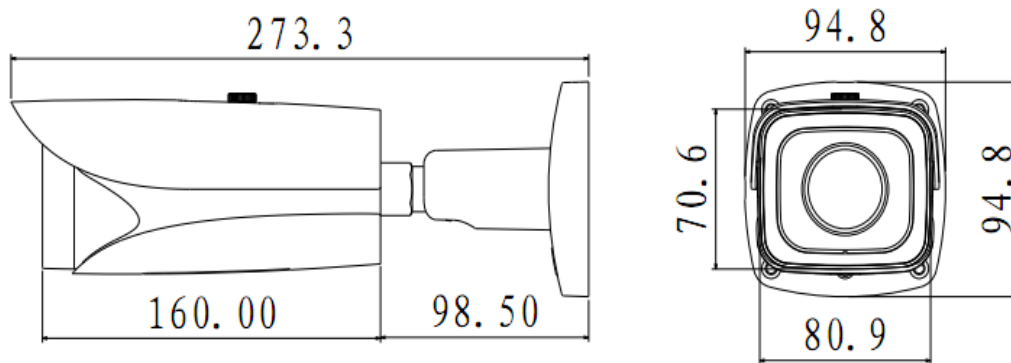

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.