




For Surveillance
Telephoto Zoom

Applicable camera (model)

C55×13.5D-ENSE11





TELEPHOTO ZOOM LENSES

55×



*Photograph is a similar model.

- Achieved super telephoto at the field angle of 0°15', best suited for long-distance monitoring such as gulf monitoring (when used on 1/2" cameras).
- In addition to the amazing brightness of F2.1, adopting the coating to reproduce the good image quality over the entire visible light range.
- Compatible with a wide range - 1", 2/3" and 1/2" - cameras.
- Built-in ND filter of T1500, supporting high sensitivity cameras.
- Can be equipped with the stabilize adapter.

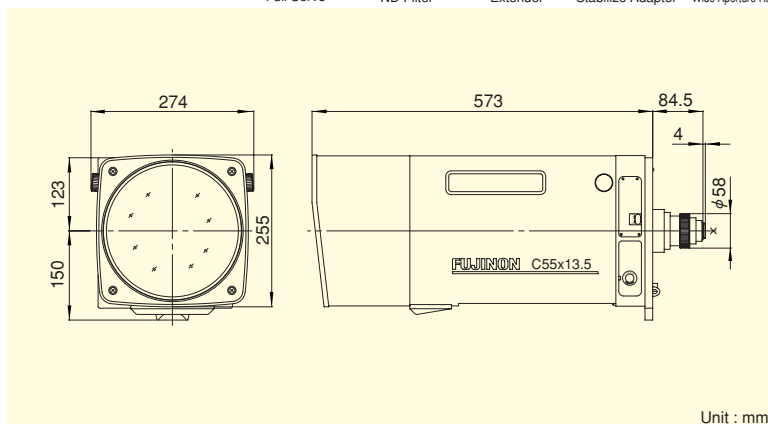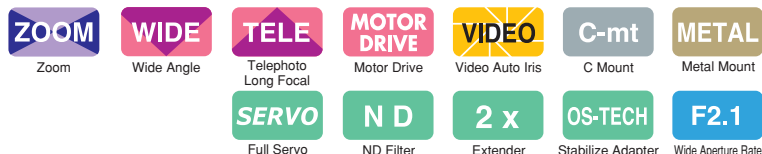

Unit : mm

			1×	2×		
Focal Length (mm)			13.5~750 (55×	27~1500 (55×		
Iris Range			F2.1 ~ T1500 (Equivalent to F1500)	F4.2 ~ T3000 (Equivalent to F3000)		
Operation	Zoom		Servo Control			
	Focus		Servo Control			
	Iris		Auto (Video Type) or Servo Control			
Angle Of View (H×V)	1"	WIDE	50°44′ × 39°09′	26°40′ × 20°10′		
		TELE	0°59′ × 0°44′	0°29′ × 0°22′		
	2/3"	WIDE	36°06′ × 27°28′	18°31′ × 13°56′		
		TELE	0°40′ × 0°30′	0°20′ × 0°15′		
	1/2"	WIDE	26°40′ × 20°10′	13°31′ × 10°10′		
		TELE	0°29′ × 0°22′	0°15′ × 0°11′		
Focusing Range (From Front Of The Lens) (m)			∞ ~ 2.4	∞ ~ 2.4		
Object Dimensions at M.O.D. (H×V) (mm)	1"	WIDE	2075 × 1556	1038 × 778		
		TELE	38 × 28	19 × 14		
	2/3"	WIDE	1427 × 1070	713 × 535		
		TELE	26 × 19	13 × 10		
	1/2"	WIDE	1038 × 778	519 × 389		
		TELE	19 × 14	9 × 7		
Back Focal Distance (in air) (mm)			25.01	25.01		
Exit Pupil Position (From Image Plane) (mm)			-245	-141		
Mount			C			
Extender			2×			
Mass (kg)			20			
Control Unit			CRD-40 (Option)			
Remarks			•With Metal Mount			
			[Electrical Specification] Power Supply : DC 12V (DC 11~16V) Current Consumption : 2.1A (Max.)			
			Zoom	Focus	Iris	Extender
CONTROL SIGNAL			TELE : 2.5V WIDE : 7.5V	NEAR : 2.5V FAR : 7.5V	AUTO / VIDEO (1Vp-p) / REMOTE / OPEN:7V, CLOSE:2V	1× : ∞ 2× : +V
Current Consumption			670mA (Max.)	670mA (Max.)	100mA (Max.)	200mA (Max.)
OPERATING TIME			1s. (Max.)	1s. (Max.)	1s. (Max.)	1s. (Max.)

Accessories

- Stabilize Adapter
TS-C11