



## ZP-TX1500

## DATA SHEET

### Matrix and Telemetry Controller



- Expandable from 16 to 96 cameras
- 8 monitor outputs
- Control from up to 4 keyboards
- Up to 96 alarm inputs
- 4 Main monitor outputs with On Screen Display and 4 Spot monitor outputs
- Remote control using RS232 interface.
- Simple menu driven programming from the keyboard
- Keyboards may be programmed to limit access to cameras and monitors
- Advanced alarm options including multiple events per alarm
- Covert cameras can be hidden from specific monitors
- Variable sequence dwell time
- Low voltage powered
- Wall or 19" rack mount capability
- Power is 9v 500mA max 4.5 Watts
- Weights; Matrix 5 kg Keyboard 3 kg

The ZP-TX1500 series combines a state of the art video matrix with the simplicity of installation associated with coax controlled systems. This combination provides a flexible cost effective control solution for both internal/ external pan/tilt/ zoom and dome applications.

The ZP-TX1500 series supports RS485 twisted pair telemetry as standard, allowing integration with IR, microwave and fibre-optic links. Modules can be added allowing control of several different domes or receiver types on one system.

Add on 16 way alarm cards with programmable functions are available for connection of up to 16 external detection devices. Up to 6 alarm cards can be added either local to the ZP-TX1500 or distributed around the site allowing up to 96 inputs.

#### *Models available in this range*

ZP-TX1500/16/8	16 in 8 out
ZP-TX1500/32/8	32 in 8 out
ZP-TX1500/EXP	16 Camera expander, to allow upto 96 inputs
ZP-TX1500/KBD	Keyboard
ZP-TX1500/SC	Starcard converter
ZP-TX1500/S	Starcard
ZP-TX1500/AL16	16 Alarm inputs
ZP-RX457WBX	AC receiver RS485 telemetry not coax capable
ZP-RX557WBX	DC receiver RS485 telemetry not coax capable
ZP-RX100	Interface for various dome heads
ZP-RX100/24	Interface for various dome heads
ZP-RX200WBX	Pan and lens control weather proof enclosure
ZP-RX300WBX	Full PTZ control Weather proof enclosure
ZP-RX400PWBX	Full PTZ receiver Coax control presets, Weather proof enclosure
ZP-RX400DCWBX	Full PTZ receiver Coax control DC output Weather proof enclosure
ZP-BBUSIF	RS232 interface for ZP-TX1500 for transmission equipment
WBX	Weatherproof Telemetry

*ZP-TX1500 series combines a state of the art video matrix with the simplicity of installation associated with coax controlled systems.*






# ZP-TX1500

# DATA SHEET

## Matrix and Telemetry Controller

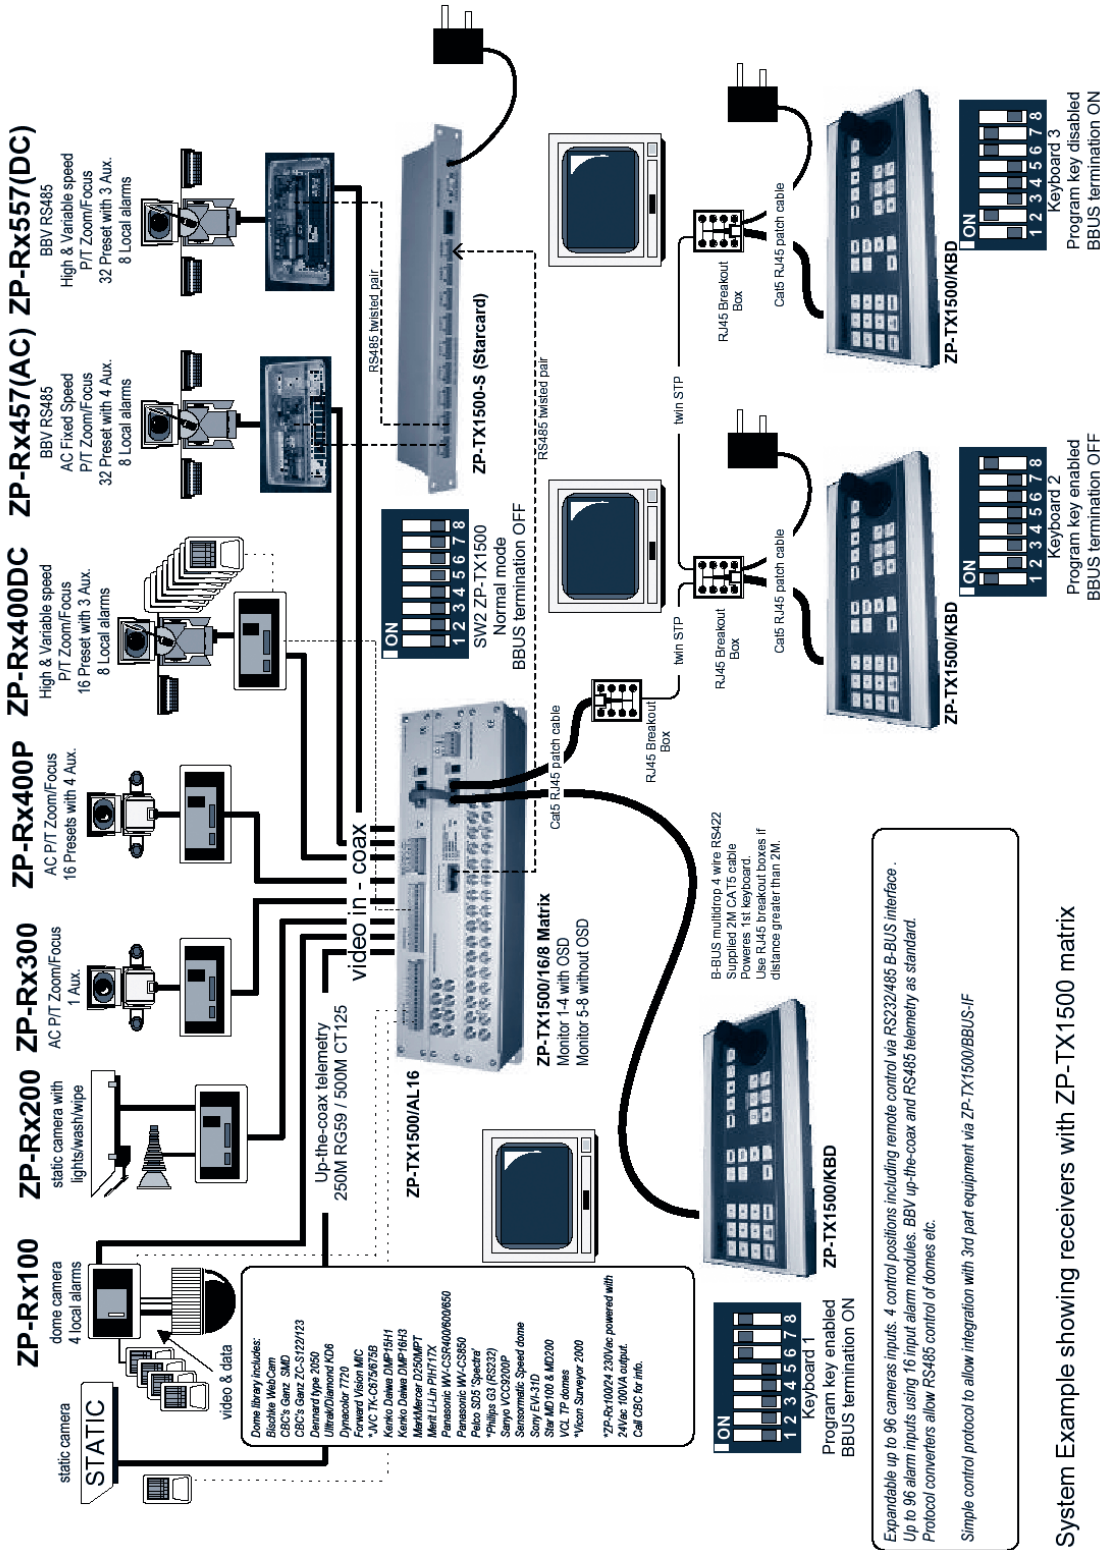

System Example showing receivers with ZP-TX1500 matrix

